

**Our Hardware Components
Are Made To The Highest Industry Standards.**

TORSION SPRING

Oil tempered, stress relieved.



10,000 Cycle
Torsion Spring
with the Standard
Hardware Set



20,000 Cycle
Torsion Spring
with the Standard
Hardware **PLUS** Set



**OPERATOR
BRACKET**

Powdercoated
and Fully Adjustable
11 GA
Steel.
(Optional Accessory)




TRACK AND HEAD ASSEMBLY

TruBalance™ Drum results in 87% improved balance
on glazed top sections with insulated glass
(Industry norm: result in significantly imbalanced doors shortening the life of
Electric Door Openers and Unsafe in Manual mode)

Galvanized rust resistant shaft.
(Industry norms typically non galvanized)

Pre-Assembled Flag Bracket that connects the
Vertical and Horizontal Track with the
Head Assembly.

Full length Horizontal Angle is standard for
Double Doors

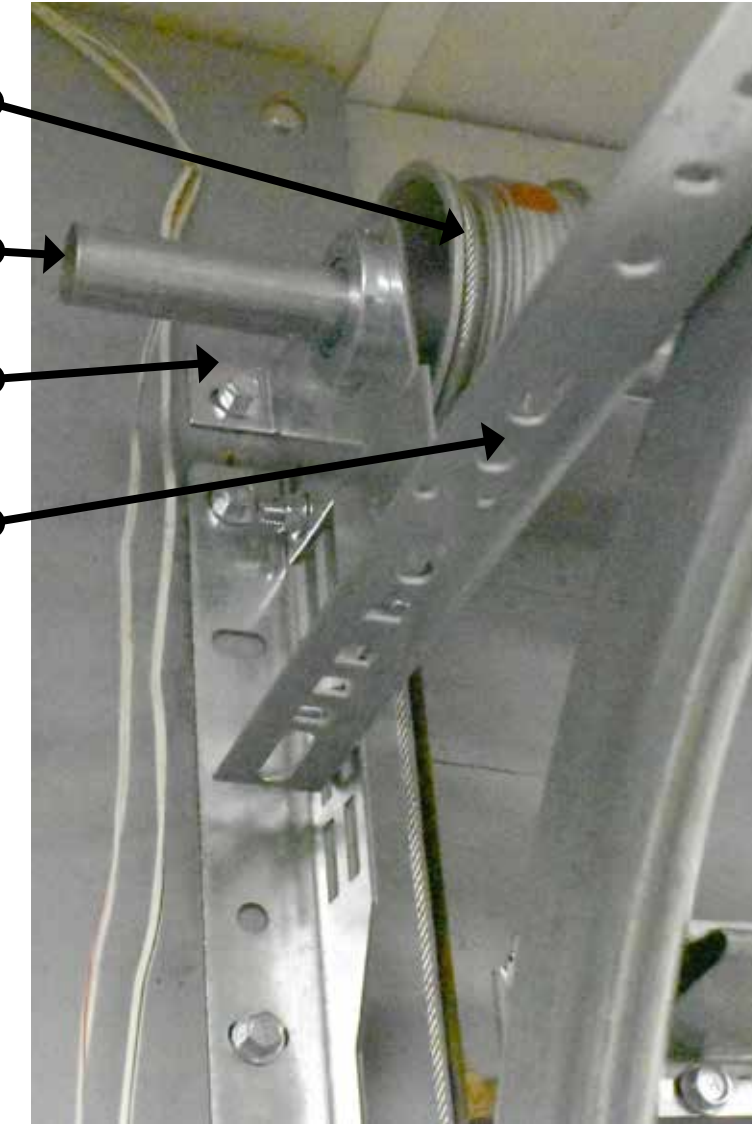


Vertical and Horizontal
Track are 16 Ga
with the Standard
Hardware Set



Vertical and Horizontal
Track are 14 Ga with the
Standard
Hardware **PLUS** Set

CENTRE BEARING

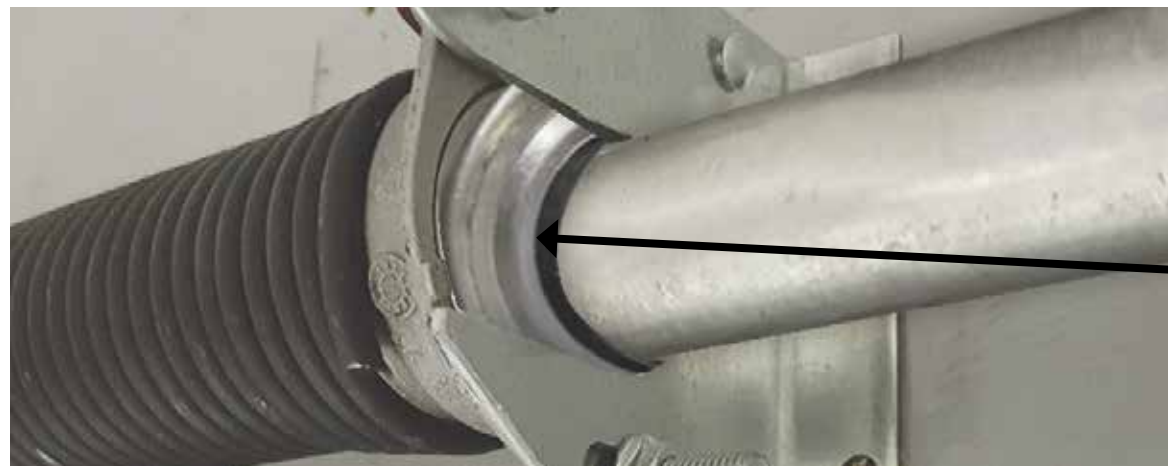

Steel Bearing on Doors with
Standard Hardware **PLUS** Set

CENTRE HINGE



Commercial-grade 14GA centre hinge.
(Industry norm: 16GA or lighter)



Designed to be incorporated with a
trussing system for added strength.



**TRACK BRACKETS, END HINGES
AND ROLLERS**



14 Ga Top Bracket



14 Ga Roller Bracket



13 Ga Bottom Bracket



10-ball bearing white
nylon rollers
on zinc plated stem
(Industry Norm: Either Steel or
Plastic)



Riveted Track Brackets
on Standard Hardware Set



Adjustable Bolted Brackets on
Standard Hardware **PLUS** Set



5 Year Hardware Warranty for
the Standard Hardware Set



Limited Lifetime Hardware
Warranty for the Standard
Hardware **PLUS** Set