



# Richards-Wilcox

Sectional Overhead Doors




## T150-MR & T150

Thermatite Sectional Insulated Steel Door Models

- Insulated sections fabricated from pre-painted, hot dipped galvanized steel with rigid polyurethane insulation core, CFC and HCFC free, face sheet stucco embossed and flush
- Sections feature thermal break, steel-polyurethane-steel sandwich formed by continuous process
- Sections formed with ship-lap joint

### Unique Multi-Ribbed (MR) Profile


- Multi-Ribbed profile complements contemporary architecture
- Perfect choice when aesthetics are a key consideration
- Non-repeating stucco surface texture resists scratches and dirt



Multi-Ribbed

### Ribbed Profile

- Recognized as a standard look on many door systems that are already installed
- RW can provide matching section replacement options to customers quickly and efficiently



Ribbed



# PRODUCT SPECIFICATIONS

## SECTION DETAILS

**SECTION THICKNESS** 1 1/2" (38mm)

### THERMAL VALUE OF SECTIONS

R 13.21 ft<sup>2</sup> hF/Btu / U 0.430 W/m<sup>2</sup>K


**FACE SHEET PROFILE** Multi-Ribbed / Ribbed

**FACE SHEET THICKNESS** 0.016" (0.41mm)

**MAXIMUM OPENING WIDTH** 29'-4" (8941mm)

**MAXIMUM OPENING HEIGHT** 22' (6706mm)

**FINISH** Two coat, baked-on paint system on exterior side, primer and polyester finish coat.




White

Brown

Silver


## GLAZING OPTIONS

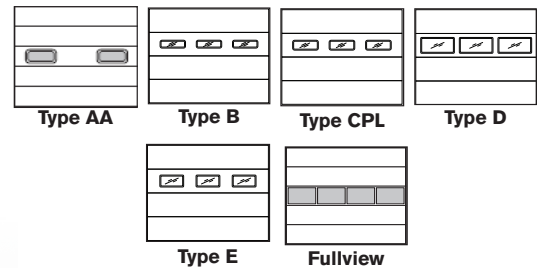

## WARRANTY

10 years against delamination of the panels  
1 year on materials and workmanship

Professionally installed and serviced by:

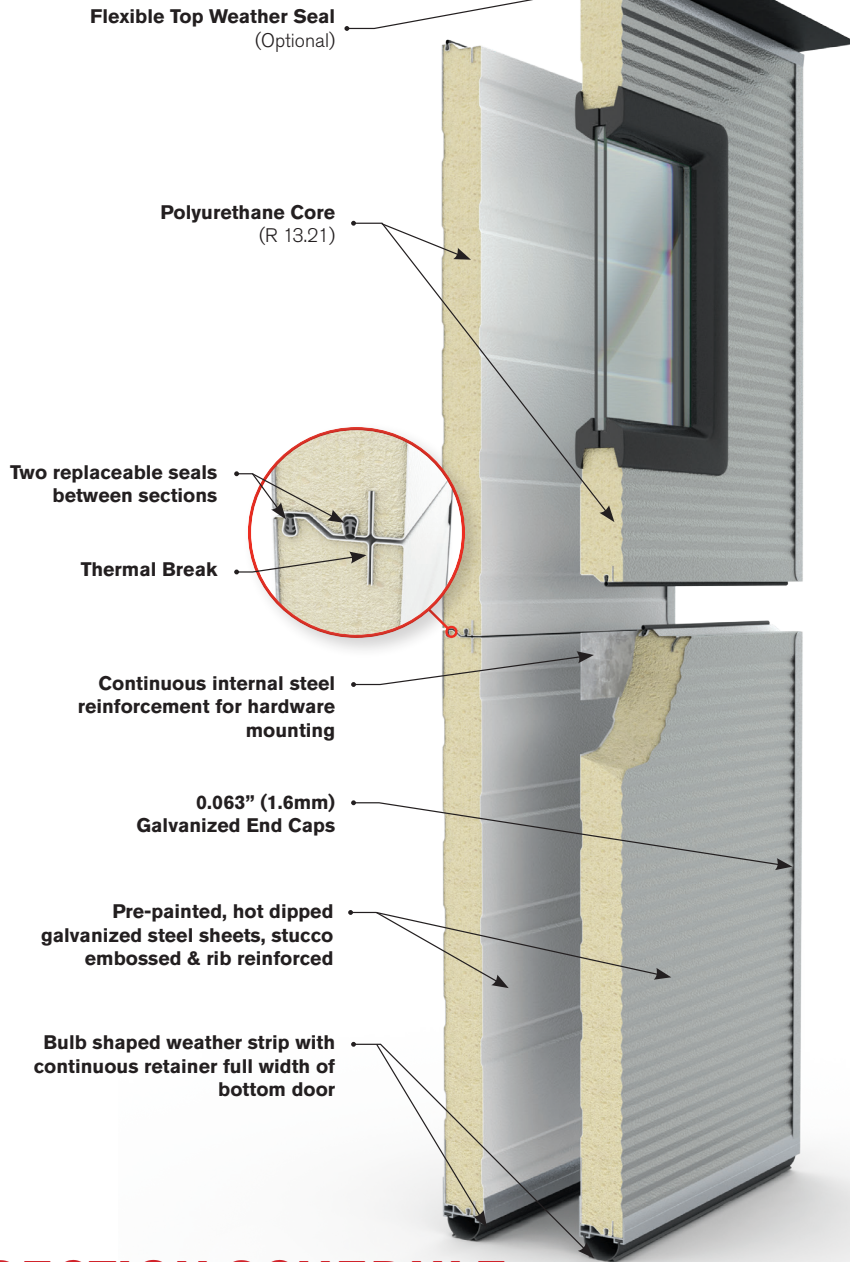

Flexible Top Weather Seal  
(Optional)

Polyurethane Core  
(R 13.21)

Two replaceable seals  
between sections

Thermal Break

Continuous internal steel  
reinforcement for hardware  
mounting

0.063" (1.6mm)  
Galvanized End Caps

Pre-painted, hot dipped  
galvanized steel sheets, stucco  
embossed & rib reinforced

Bulb shaped weather strip with  
continuous retainer full width of  
bottom door

## SECTION SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1" (2159mm to 2464mm)	4	8'-0" to 9'-2" (2438mm to 2794mm)	2
8'-2" to 10'-1" (2489mm to 3073mm)	5	9'-3" to 12'-2" (2819mm to 3708mm)	3
10'-2" to 12'-1" (3099mm to 3683mm)	6	12'-3" to 16'-2" (3734mm to 4928mm)	4
12'-2" to 14'-1" (3708mm to 4293mm)	7	16'-3" to 19'-2" (4953mm to 5842mm)	5
14'-2" to 16'-1" (4318mm to 4902mm)	8	19'-3" to 24'-2" (5867mm to 7366mm)	6
16'-2" to 18'-1" (4928mm to 5512mm)	9	24'-3" to 28'-2" (7391mm to 8585mm)	7



5100 Timberlea Boulevard,  
Mississauga, Ontario Canada L4W 2S5

www.rwdoors.com

1 (800) 667-1572