

# THERMATITE



by  
**Richards-Wilcox™**  
Garage Doors



## T200-MR & T200

### Overhead Sectional Insulated Steel Door


- Fabricated from pre-painted, hot dipped stucco embossed galvanized steel.



- Insulated with 2" of Neufoam™ polyurethane insulation. CFC and HCFC free.



- Sections feature Weatherlock™ thermal break and ship lap section joint.



**Multi-Ribbed**

#### Unique Multi-Ribbed (MR) Profile

- Multi-Ribbed profile complements contemporary architecture.
- Perfect choice when aesthetics are a key consideration.
- Non-repeating stucco surface texture resists scratches and dirt.




**Ribbed**

#### Ribbed Profile

- Recognized as a standard look on many door systems that are already installed.
- RW can provide matching section replacement options to customers quickly and efficiently.



# PRODUCT SPECIFICATIONS

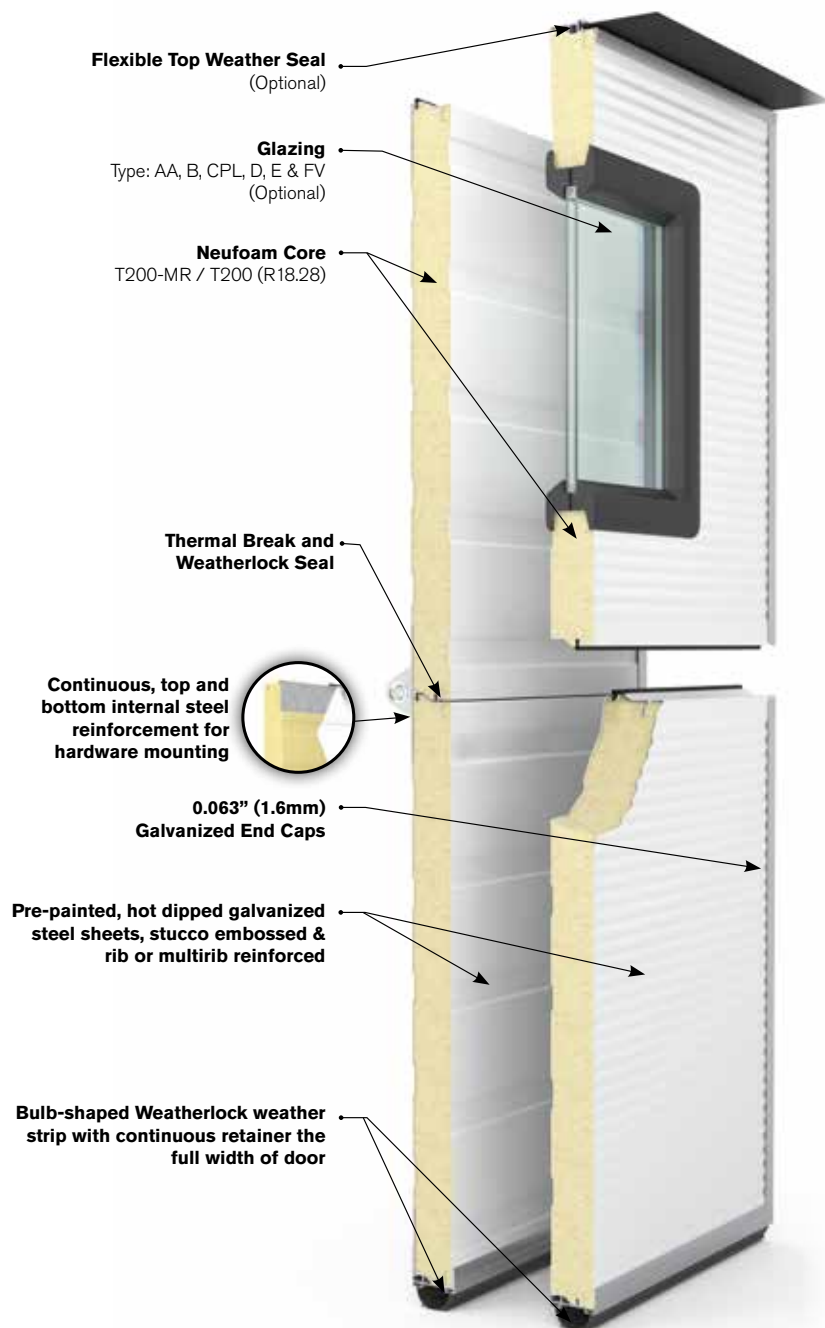

## SECTION SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1" (2159mm to 2464mm)	4	8'-0" to 9'-2" (2438mm to 2794mm)	2
8'-2" to 10'-1" (2489mm to 3073mm)	5	9'-3" to 12'-2" (2819mm to 3708mm)	3
10'-2" to 12'-1" (3099mm to 3683mm)	6	12'-3" to 16'-2" (3734mm to 4928mm)	4
12'-2" to 14'-1" (3708mm to 4293mm)	7	16'-3" to 19'-2" (4953mm to 5842mm)	5
14'-2" to 16'-1" (4318mm to 4902mm)	8	19'-3" to 24'-2" (5867mm to 7366mm)	6
16'-2" to 18'-1" (4928mm to 5512mm)	9	24'-3" to 28'-2" (7391mm to 8585mm)	7

## SECTION DETAILS

**SECTION THICKNESS** 2" (51mm)

**THERMAL VALUE OF SECTIONS\***

**R** 18.28 ft<sup>2</sup> hF/Btu


**FACE SHEET PROFILE** Multi-Ribbed / Ribbed

**FACE SHEET THICKNESS** 0.016" (0.41mm)

**MAXIMUM OPENING WIDTH\*\*** 30'-2" (9195mm)


**MAXIMUM OPENING HEIGHT** 22' (6706mm)

**FINISH** Two coat, baked-on paint system on exterior side, primer and polyester finish coat.



White

## GLAZING OPTIONS

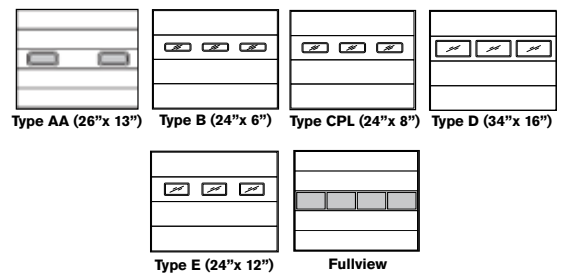

## WARRANTY

**10 years against delamination of the panels**  
**1 year on materials and workmanship**

\*Thermal Values Calculated. \*\*For larger sizes, please consult factory.

Professionally installed and serviced by: