



# Richards-Wilcox

Sectional Overhead Doors



## T200-MR, T200 & T200A

**Thermatite** Sectional Insulated Steel Door Models

- Insulated sections fabricated from pre-painted, hot dipped galvanized steel (T200-MR, T200) or aluminum (T200A) sheets with rigid polyurethane insulation core, CFC and HCFC free, face sheet stucco embossed and rib reinforced
- Sections feature thermal break, steel-polyurethane-steel sandwich formed by continuous process
- Sections formed with ship-lap joint

### Unique Multi-Ribbed (MR) Profile

- Multi-Ribbed profile complements contemporary architecture
- Perfect choice when aesthetics are a key consideration
- Non-repeating stucco surface texture resists scratches and dirt

### Ribbed Profile

- Recognized as a standard look on many door systems that are already installed
- RW can provide matching section replacement options to customers quickly and efficiently



**Multi-Ribbed**



**Ribbed**

# PRODUCT SPECIFICATIONS

## SECTION DETAILS

**SECTION THICKNESS** 2" (51mm)

### THERMAL VALUE OF SECTIONS

R 18.28 ft<sup>2</sup> hF/Btu / U 0.311 W/m<sup>2</sup>K

**FACE SHEET PROFILE** Multi-Ribbed / Ribbed

### FACE SHEET THICKNESS

**Steel** -.016" (.41mm) **Aluminum** -.025" (.64mm)

**MAXIMUM OPENING WIDTH** 24'-2" (7366mm)


**MAXIMUM OPENING HEIGHT** 22' (6706mm)

**FINISH** Two coat, baked-on paint system on exterior side, primer and polyester finish coat.



White Only


## GLAZING OPTIONS

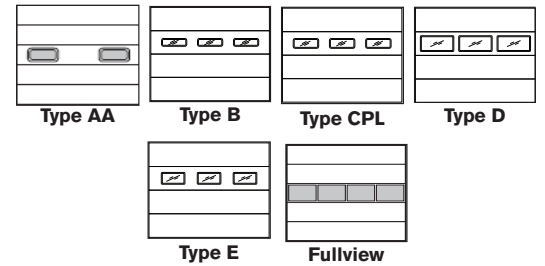

## WARRANTY

**10 years** against delamination of the panels  
**1 year** on materials and workmanship

Professionally installed and serviced by:

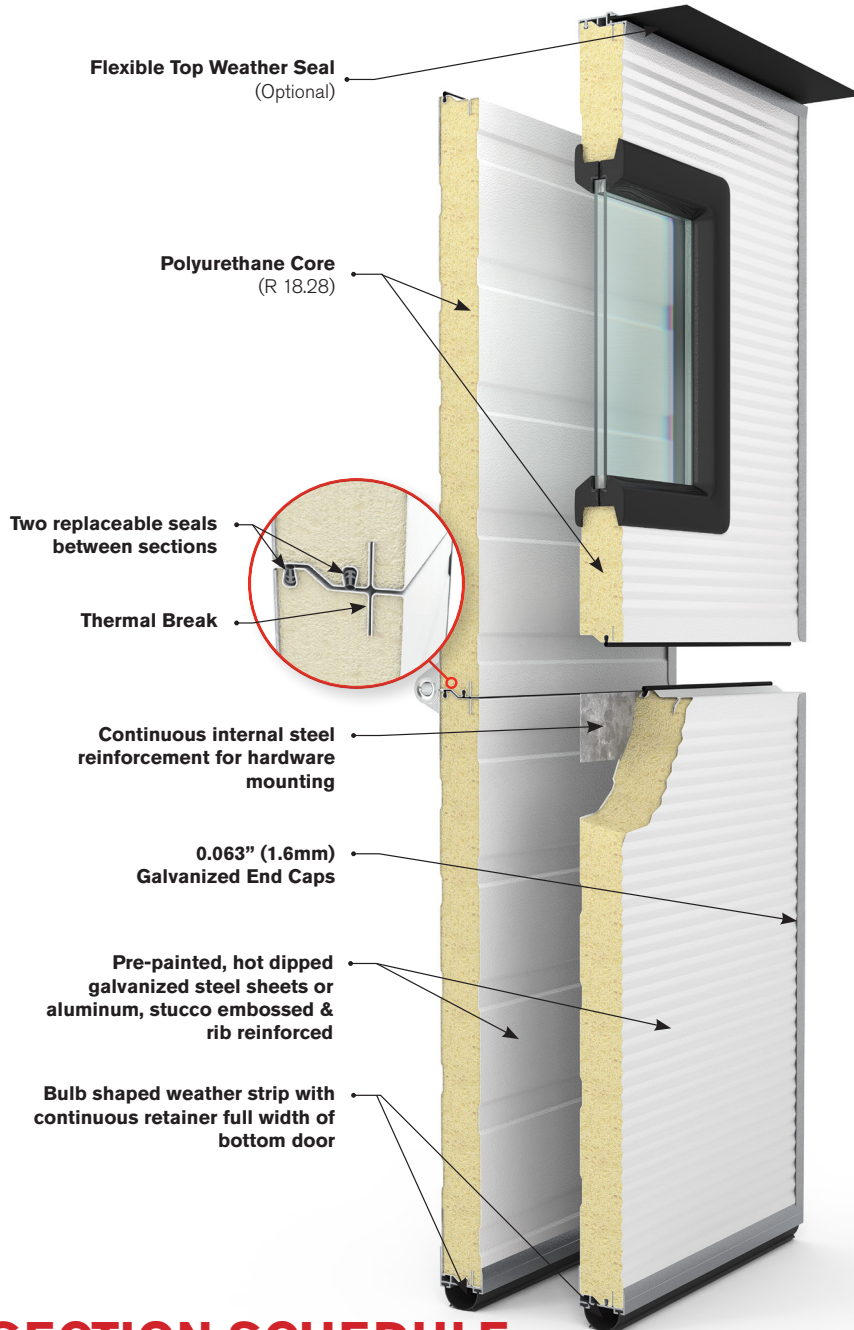

**Flexible Top Weather Seal**  
(Optional)

**Polyurethane Core**  
(R 18.28)

**Two replaceable seals**  
between sections

**Thermal Break**

**Continuous internal steel**  
reinforcement for hardware  
mounting

**0.063" (1.6mm)**  
**Galvanized End Caps**

**Pre-painted, hot dipped**  
galvanized steel sheets or  
aluminum, stucco embossed &  
rib reinforced

**Bulb shaped weather strip**  
with continuous retainer full width of  
bottom door

## SECTION SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1" (2159mm to 2464mm)	4	8'-0" to 9'-2" (2438mm to 2794mm)	2
8'-2" to 10'-1" (2489mm to 3073mm)	5	9'-3" to 12'-2" (2819mm to 3708mm)	3
10'-2" to 12'-1" (3099mm to 3683mm)	6	12'-3" to 16'-2" (3734mm to 4928mm)	4
12'-2" to 14'-1" (3708mm to 4293mm)	7	16'-3" to 19'-2" (4953mm to 5842mm)	5
14'-2" to 16'-1" (4318mm to 4902mm)	8	19'-3" to 24'-2" (5867mm to 7366mm)	6
16'-2" to 18'-1" (4928mm to 5512mm)	9	24'-3" to 28'-2" (7391mm to 8585mm)	7



5100 Timberlea Boulevard,  
Mississauga, Ontario Canada L4W 2S5

[www.rwdoors.com](http://www.rwdoors.com)

1 (800) 667-1572