



**Richards-Wilcox™**  
Garage Doors

# THERMATITE™



## T150-MR & T150 OVERHEAD SECTIONAL INSULATED STEEL DOORS

- Fabricated from pre-painted, hot dipped stucco embossed galvanized steel.



- Insulated with 1.5" of Neufoam™ polyurethane insulation. CFC and HCFC free.



- Sections feature Weatherlock™ thermal break and ship lap section joint.



**Multi-Ribbed**

### Unique Multi-Ribbed (MR) Profile

- Multi-Ribbed profile complements contemporary architecture.
- Perfect choice when aesthetics are a key consideration.
- Non-repeating stucco surface texture resists scratches and dirt.



**Ribbed**

### Ribbed Profile

- Recognized as a standard look on many door systems that are already installed.
- RW can provide matching section replacement options to customers quickly and efficiently.

# PRODUCT SPECIFICATIONS

## SECTION DETAILS

**SECTION THICKNESS** 1 1/2" (38mm)

**THERMAL VALUE OF SECTIONS\***  
R 13.21 ft<sup>2</sup> hF/Btu

**FACE SHEET PROFILE** Multi-Ribbed / Ribbed

**FACE SHEET THICKNESS** 0.016" (0.41mm)

**MAXIMUM OPENING WIDTH\*\*** 29'-4" (8941mm)

**MAXIMUM OPENING HEIGHT** 22' (6706mm)

**FINISH** Two coat, baked-on paint system on exterior side, primer and polyester finish coat.




White

Silver

Brown

## GLAZING OPTIONS

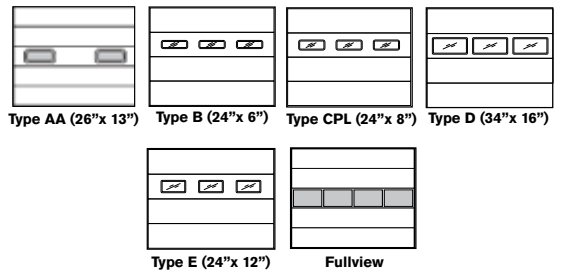

Type AA (26" x 13")

Type B (24" x 6")

Type CPL (24" x 8")

Type D (34" x 16")


Type E (24" x 12")

Fullview

## WARRANTY

**10 years against delamination of the panels**  
**1 year on materials and workmanship**

\*Thermal Values Calculated. \*\*For larger sizes, please consult factory.

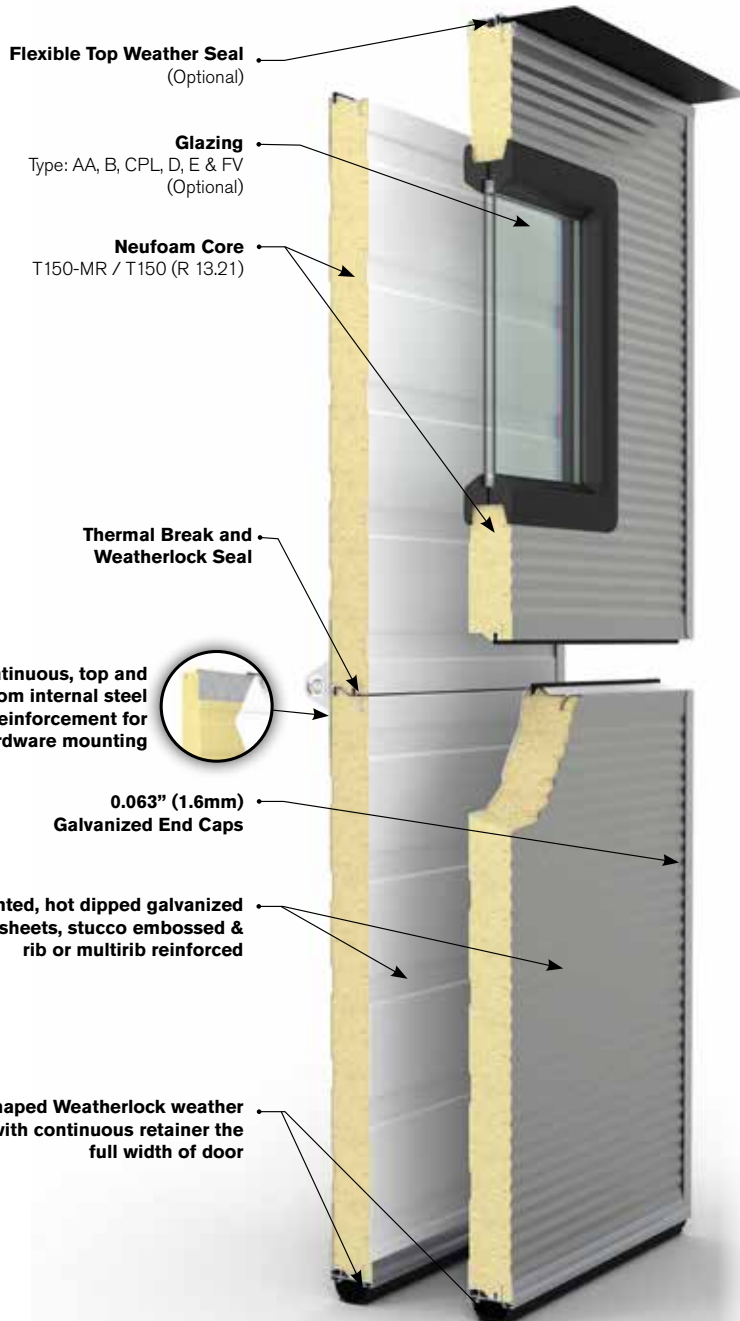

**Flexible Top Weather Seal**  
(Optional)

**Glazing**  
Type: AA, B, CPL, D, E & FV  
(Optional)

**Neufoam Core**  
T150-MR / T150 (R 13.21)

**Thermal Break and Weatherlock Seal**

**Continuous, top and bottom internal steel reinforcement for hardware mounting**

**0.063" (1.6mm) Galvanized End Caps**

**Pre-painted, hot dipped galvanized steel sheets, stucco embossed & rib or multirib reinforced**

**Bulb-shaped Weatherlock weather strip with continuous retainer the full width of door**

## SECTION SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1" (2159mm to 2464mm)	4	8'-0" to 9'-2" (2438mm to 2794mm)	2
8'-2" to 10'-1" (2489mm to 3073mm)	5	9'-3" to 12'-2" (2819mm to 3708mm)	3
10'-2" to 12'-1" (3099mm to 3683mm)	6	12'-3" to 16'-2" (3734mm to 4928mm)	4
12'-2" to 14'-1" (3708mm to 4293mm)	7	16'-3" to 19'-2" (4953mm to 5842mm)	5
14'-2" to 16'-1" (4318mm to 4902mm)	8	19'-3" to 24'-2" (5867mm to 7366mm)	6
16'-2" to 18'-1" (4928mm to 5512mm)	9	24'-3" to 28'-2" (7391mm to 8585mm)	7



**Richards-Wilcox**  
Garage Doors

**1-800-667-1572**  
**www.rwdoors.com**



**MADE IN CANADA**