



Richards-Wilcox™
Garage Doors

THE RICHARDS-WILCOX™ THERMATITE™



T200C OVERHEAD SECTIONAL INSULATED STEEL DOORS

- Fabricated from pre-painted, hot dipped stucco embossed galvanized steel. Available in 8 Standard colours.



- Insulated with 2" of Neufoam™ polyurethane insulation. CFC and HCFC free.



- Sections feature Weatherlock™ thermal break and tongue and groove section joint.

Unique Multi-Ribbed (MR) Profile

- Multi-Ribbed profile complements contemporary architecture
- Perfect choice when aesthetics are a key consideration
- Non-repeating stucco surface texture resists scratches and dirt


Ribbed Profile

- Recognized as a standard look on many door systems that are already installed
- RW can provide matching section replacement options to customers quickly and efficiently

Available in 8 Standard Colours



PRODUCT SPECIFICATIONS

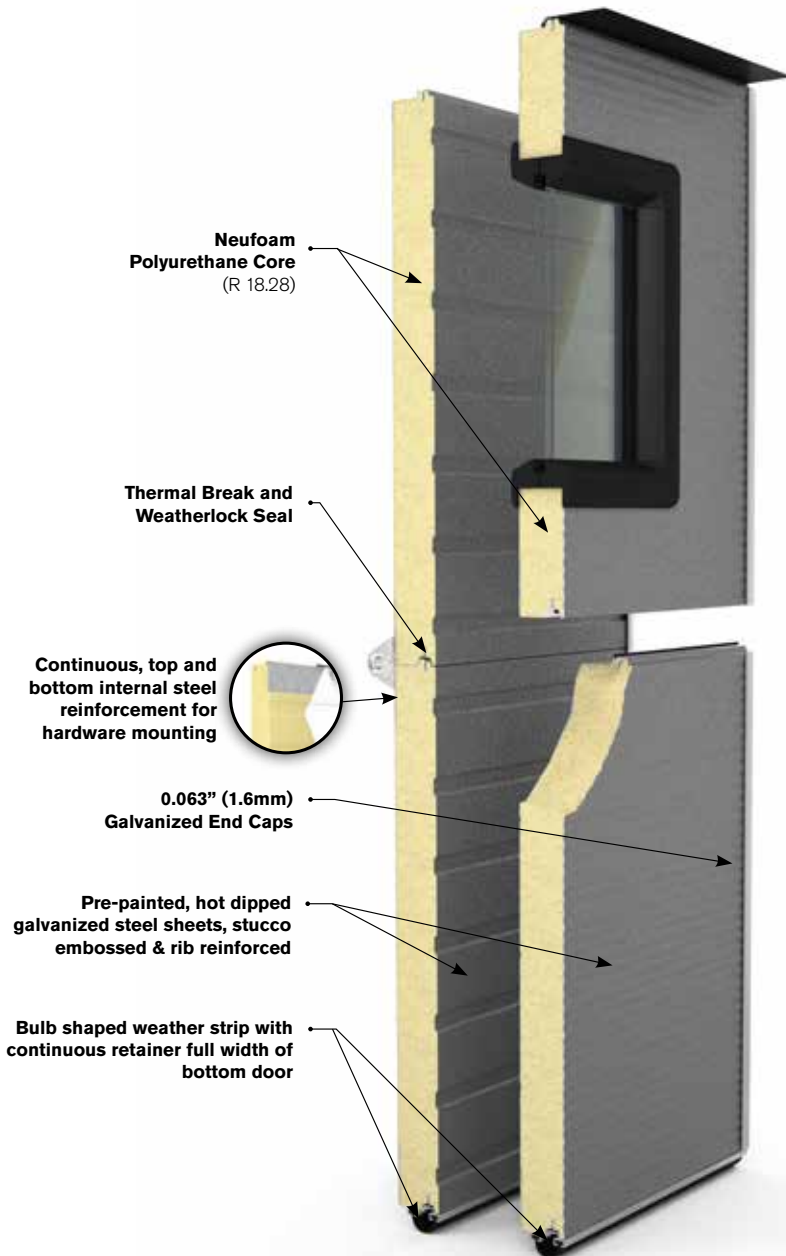

SECTION DETAILS

SECTION THICKNESS 2" (51mm)

THERMAL VALUE OF SECTIONS*
R 18.28 ft² hF/Btu

FACE SHEET PROFILE Multi-Ribbed / Ribbed

FACE SHEET THICKNESS 0.016" (0.41mm)


MAXIMUM OPENING WIDTH 24'-2" (7366mm)

MAXIMUM OPENING HEIGHT 22' (6706mm)

FINISH Two coat, baked-on paint system on exterior side, primer and polyester finish coat.



GLAZING OPTIONS

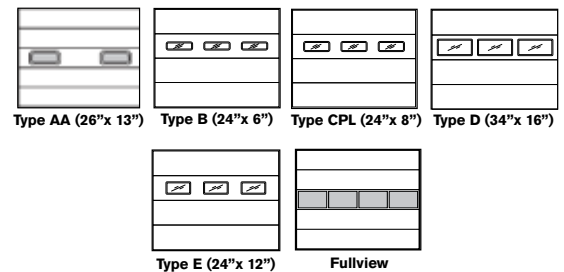

SECTION SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1"	4	8'-0" to 9'-2"	2
8'-2" to 10'-1"	5	9'-3" to 12'-2"	3
10'-2" to 12'-1"	6	12'-3" to 16'-2"	4
12'-2" to 14'-1"	7	16'-3" to 19'-2"	5
14'-2" to 16'-1"	8	19'-3" to 24'-2"	6
16'-2" to 18'-1"	9		

WARRANTY

10 years against delamination of the panels
1 year on materials and workmanship

*Thermal Values Calculated.



Richards-Wilcox™
Garage Doors

1-800-667-1572
www.rwdoors.com



MADE IN CANADA