




**Richards-Wilcox**  
Garage Doors

**ALUMATITE®**



## **A175, A200 & A300 COMMERCIAL OVERHEAD SECTIONAL ALUMINUM DOOR**

Alumatite doors have long been the standard fixture for facilities that require dependable, attractive doors that offer maximum visibility. The extruded aluminum frame can be finished with a choice of anodizing or ArmorBrite™ powder coat. Alumatite door sections are a full 1¾", 2", or 3" thick.

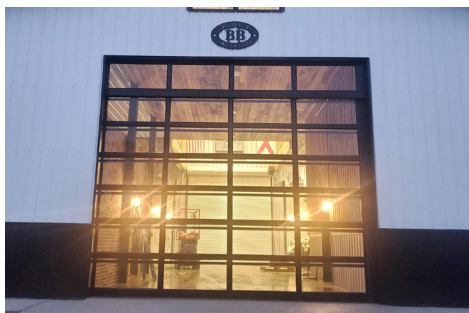

### **Alumatite A175**

This benchmark product provides reliability and durability to meet or exceed the requirements of daily use. With 1-3/4" thick door sections and streamlined rail construction, Alumatite A175 aluminum garage doors are engineered for lasting beauty and durability.



### **Alumatite A200**

Designed for peak performance and strength, this 2" thick door is available in larger sizes and features bold rail construction for maximum durability, reliability and beauty.



### **Alumatite A300**

This 3" thick A300 is the sturdiest garage door in the Alumatite family. The AV300 adds increased strength for unparalleled durability as well as unmatched aesthetics with the incorporation of U-Bar trussing built into the rails as required to maximize visibility without any obstructions.



**Richards-Wilcox**  
Garage Doors

**1-800-667-1572 • [www.rwdoors.com](http://www.rwdoors.com)**

# PRODUCT SPECIFICATIONS

Sections fabricated from 6036-T6 aluminum alloy, heavy wall tubular aluminum extrusions.  
 Sections assembled with 5/16" diameter bolts.



## Section Thickness

**A175:** 1 3/4"      **A200:** 2"      **A300:** 3"

## End Stile Width

**A175, A200 & A300:** 3 3/8" or 6 1/2"

## Centre Stile Width

**A175:** 1 7/16"      **A200:** 3 5/8"      **A300:** 3 5/8"

## Maximum Opening Width

**A175:** 16'      **A200:** 24'      **A300:** 24'

## Maximum Opening Height

**A175:** 16'      **A200:** 24'      **A300:** 24'




## Optional Thermatite Bottom Section

Insulated sections fabricated from pre-painted, hot dipped galvanized, steel sheet; with rigid Neufoam™ polyurethane insulation core, CFC and HCFC free, face sheet stucco embossed and rib reinforced.

## Finish Options



Clear Anodized



White Powdercoat



Black Powdercoat



Brown Powdercoat

## Powder Coating



Alumatite door rails and stiles can be powder coated in any of 188 colors for an attractive appearance and exceptional durability.

## Glazing

Available in impact glass, tempered, tinted, insulated, acrylic, Low E Glass or polycarbonate in a variety of thicknesses.  
 Glass thickness range from 1/8" to 1".



Tinted Bronze

Tinted Smoke

White Laminate

Satin

Clear

Insulated

## Warranty

R-W warrants the door sections against defects in material and workmanship for five (5) years from date of delivery to the original purchaser. Window components are warranted against defects in material and workmanship for three (3) years from date of delivery to the original purchaser.