



Richards-Wilcox
Garage Doors


THERMATITE U-SERIES



T150U, T175U, T200U & T300U **Overhead Sectional Insulated Steel Door**

- Polyurethane insulation without CFCs or HCFCs.
- Manufactured from pre-painted, hot-dip galvanized steel with an embossed stucco texture.
- Available in Four Thicknesses (1 1/2", 1 3/4", 2" & 3")
- Longer panel lengths allow for multiple sizes.
- Full length reinforcement strips along the upper and lower rail edge for flexible hardware placement and cut and cap options.

PRODUCT SPECIFICATIONS

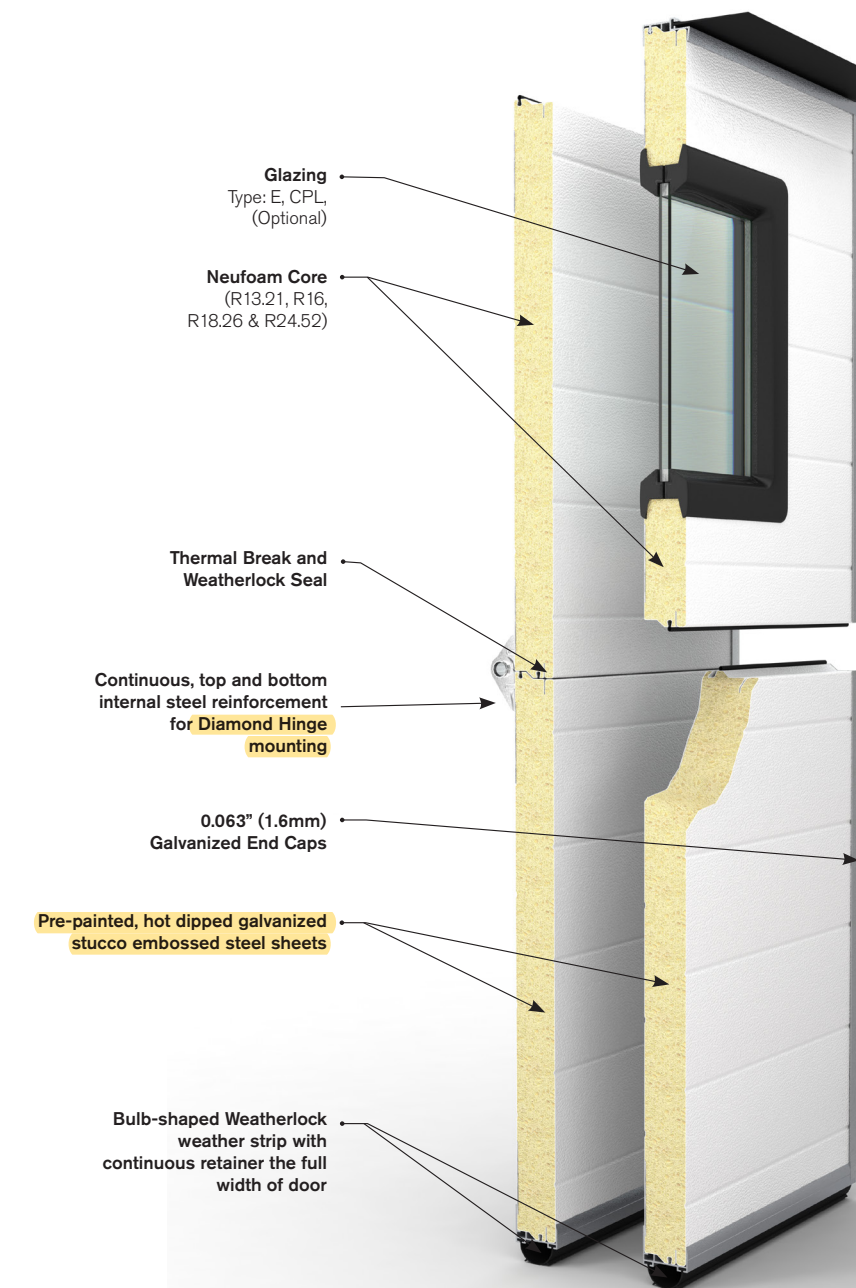

SECTION DETAILS

Section Thickness

T150U: 1 1/2"

T175U: 1 3/4"

T200U: 2"

T300U: 3"

Thermal Value of Sections*

T150U: R 13.21

T175U: R 16

T200U: R 18.28

T300U: R 24.52

Face Sheet Profile **Pencil Groove**

Face Sheet Thickness 0.016" (27 Gauge)

Minimum Panel Length 8'

Maximum Panel Length 36'-2"

Finish Two coat, baked-on paint system on exterior side, primer and polyester finish coat.



White

GLAZING OPTIONS



Type E
(24"x 12")

Type CPL
(24"x 8")

SECTION SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1"	4	8'-0" to 9'-2"	2
8'-2" to 10'-1"	5	9'-3" to 12'-2"	3
10'-2" to 12'-1"	6	12'-3" to 16'-2"	4
12'-2" to 14'-1"	7	16'-3" to 19'-2"	5
14'-2" to 16'-1"	8	19'-3" to 24'-2"	6
16'-2" to 18'-1"	9	24'-3" to 28'-2"	7

WARRANTY

10 years against delamination of the panels
1 year on materials and workmanship

*Thermal Values Calculated.



Richards-Wilcox
Garage Doors

1-800-667-1572
rwdoors.com



Made in Canada